FLEXIBLE SOLAR PANEL

TS-FS40





GIVING YOU MORE



3% positive tolerance



Series of internal harsh tests



Authorised photovoltaic certificates



Linear performance warranty

FS series is at the top of the range, thanks to the use of selected SunPower monocrystalline silicon cells, reaching a record 23% conversion of sunlight into electricity and with a pleasant appearance, thanks to back-contact technology which hides the electrical contacts. SunPower cells represent the most advanced available technology on the market, and make the Top Solar panels the highest-efficiency flexible panels.


www.topsolar-energy.com

Shenzhen Top Solar Energy Co.,Ltd.
F4,Building C,Zhonghengxinda Industrial Park,
Shajing Town,Baoan District,Shenzhen City,Guangdong Province,China
Tel:86 755 85224431 Fax:86 755 28167996 Email:info@topsolar-energy.com



FLEXIBLE SOLAR PANEL

TS-FS40

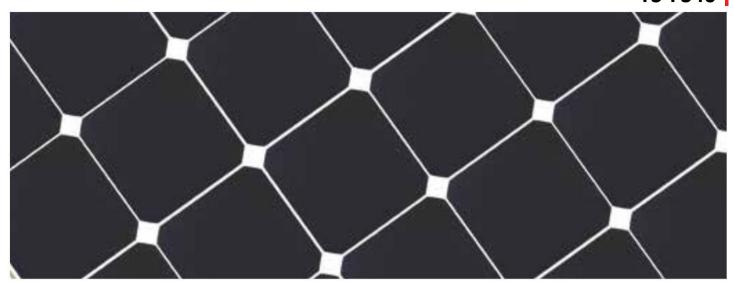

Electrical Characteristics under STC*

Model No.:	TS-FS40
Maximum Power-Pmax(Wp)	40W
Voltage at Maximum Power-Vmp(V)	19.8V
Current at Maximum Power-Imp(A)	2.03A
Open Circuit Voltage-Voc(V)	23.8V
Short Circuit Current-Isc(A)	2.18A
Solar Cell Efficiency(%)	22.2
Power Tolerance(%)	0/+3

Dimensions

Length(mm)	550	
Width(mm)	420	
Thickness(mm)	1.8	
Weight(kg)	0.75	

Temperature Characteristics

Temperature Coefficient of Pmax(%)	- 0.38%/℃
Temperature Coefficient of Voc(%)	–0.28%/℃
Temperature Coefficient of Isc(%)	0.06%/℃







–40°C to +85°C

600V DC

10A

Maximum System Ratings

Operating Temperature

Maximum System Voltage

Maximum Series Fuse Rating

*STC(Standard Testing Conditions):Irradiance 1000W/m²,cell temperature 25°C,AM=1.5 *NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s The specifications in this datasheet are subjected to change without prior notice